



## SUMMER DECK MAINTENANCE

### Lantos Timber Preserver DT610

*Keeps Decks Looking Spectacular*

*Lanolin Supplemental Treatment*

*Natures Natural Timber Finish*

*Long Term Moisture Barrier Protection*

*Long Term Timber Preservation*

*Environmentally Safe*



Natural Products with Countless Solutions



# Protect Your Deck from the Weather

## Rain. (Salt atmospheric conditions)

Water is a deck's greatest enemy, finding and penetrating any weak spots or openings in the wood, such as exposed edges, nail or screw holes, splits, knots, and cracks. If the wood isn't protected by Lantos Lanolin waterproofing preserver / sealer, it's prone to rot. Though cedar, redwood, and pressure-treated pine resist rot better than other woods, all decks eventually show some water damage. If water seems to soak into your deck after a rainstorm instead of beading, it probably needs to be re coated or resealed. Most decks need to be resealed every year or two.




## Mold

Even if the wood is sound, decks in damp climates or heavy shade can take on a mossy patina. Dirt, leaves, needles, and other material accumulate on the deck, allowing slippery mold and mildew to form. You can usually remove this layer of mold by scrubbing with a deck cleaner or mild bleach solution. To prevent further buildup, sweep the deck often and use a crevice tool to remove debris from between boards. You can use a garden hose with sprayer to rinse off dirt, but be careful with power washers -- they can damage wood.




## Sun

Baking sun not only fades wood, but also dries it out, making it susceptible to water retention and rot. If your deck is dry and faded, sand it lightly until the natural colour come back. Brush away all soils. Once your deck regains some color, apply a further coat of Lantos Lanolin Preserver DT 610 due the use of lanolin derivatives does not require UV Inhibitors, that disrupt the chemical reactions cause by ultraviolet light and goes on protecting your deck.

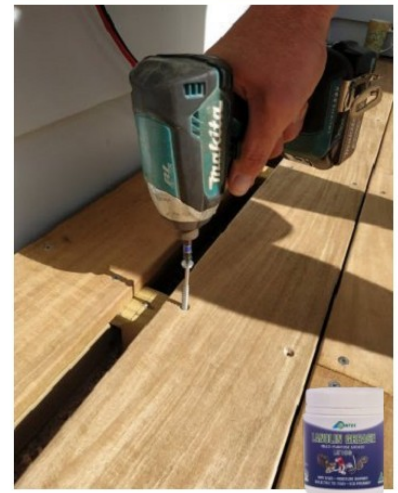

## Temperature changes

Freeze-thaw cycles in winter and extreme heat in summer put stress on wood, causing boards to expand, contract, and shift. The most common signs of this movement are popped-up nails. If pounding nails down doesn't keep them from popping back up, try replacing them with new, longer nails or deck screws. Always choose corrosion-resistant fasteners for deck boards.

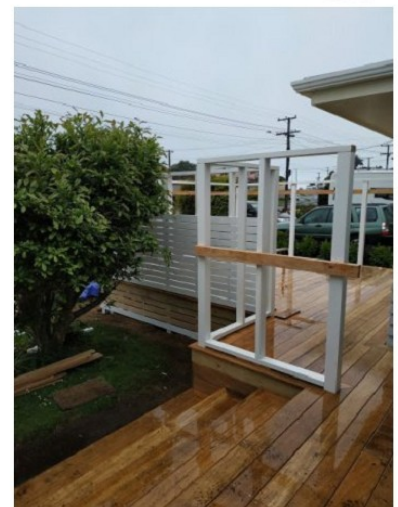

**APPLICATION BOOK CAN BE FOUND ON LANTOS COATINGS WEBSITE IN THE TECHNICAL SECTION**

# Natures Natural Timber Protection

## PROTECTS: PENETRATES: PRESERVES: SEALS

### TIMBER PRESERVER DT610

**For Dressed Timber**  
**ECO-FRIENDLY - LOW TOXICITY**  
**NO TACK, UV ABSORBER**  
**SAFE AROUND WATERWAYS**



CODE	PACK
DT610\SP-0001	750ml Spray Pack
DT610\0005	5 ltr Mini drum
DT610\0020	20 ltr cube
DT610\0200	200 ltr DRUM

#### PHYSICAL PROPERTIES

**Appearance:** Light Brown Liquid  
**Boiling Point range:** >250  
**Flash Point (°C):** >125  
**Specific Gravity (g/ml):** @15°C) 0.90  
**pH:** Neutral  
**Viscosity cPs, mPas @ 20°C:** 40  
**Solubility in Water:** Immiscible  
**Low VOC**  
**NO wool grease odour**

#### Description

Timber Preserver DT610 is a natural lanolin based liquid coating. It is a non tack lanolin surface preserver. A low build, penetrating, moisture resistant Timber treatment. It penetrates into the surface of the timber giving a water repellent durable preserving coat. It dries slowly to a natural finish maintaining the appearance of the original natural timber.

Prevents drying, cracking and splitting of wood and is a barrier to wood rot.

Environmentally friendly, especially around waterways.

#### Suitable for

Dressed timber including decking, outdoor furniture, fencing, gates, and cladding.

One coat only is applied by hand or spray,

#### Coverage Guide

<b>Hardwood New</b>	<b>10-15m<sup>2</sup>/L</b>
<b>Hardwood Seasoned</b>	<b>8-10 m<sup>2</sup>/L</b>
<b>Softwood New</b>	<b>9-11m<sup>2</sup>/L</b>
<b>Softwood Seasoned</b>	<b>8-9m<sup>2</sup>/L</b>

Estimated dry time - 6 hours

**Refer Lantos Timber Book on this website for best application.**

#### STORAGE AND TRANSPORT

Classified as non-Dangerous Goods  
 Keep in a cool well-ventilated place  
 Keep out of reach of children  
 Shelf Life - 10 years if kept sealed in a controlled temperature enclosed environment < 25°C

For safe handling of this product, please consult the Safety Data Sheet (SDS)







**Lanolin Technologies Pty Ltd**  
**100 Mitchell Road, Cardiff**  
**NSW 2285, Australia**  
**Phone: (DD): 1300 664 663**  
**Fax: +61 2 8076 8600**  
**Email: [sales@lantoscoatings.com](mailto:sales@lantoscoatings.com)**  
**Web: [www.lantoscoatings.com](http://www.lantoscoatings.com)**

**Lantos Coatings Pte Ltd**  
**(Reg.: 201819189M)**  
**2 Pioneer, Sector 1,**  
**Singapore, 628414**  
**Phone: +65 9026 6249**  
**Email: [sales@lantoscoatings.com](mailto:sales@lantoscoatings.com)**  
**Web: [www.lantoscoatings.com](http://www.lantoscoatings.com)**



#### LEGAL DISCLAIMER AND COPYRIGHT

The information, relating to the application and end use of Lantos Coatings products, are given in good faith based on Lantos Coatings knowledge and experience of the products, when correctly handled and applied in according to manufacturers recommendations. However, due to actual differences in materials, possible site conditions and / or any other factor that could affect product performance that is beyond its control, Lantos Coatings makes no other warranty, either express or implied, concerning this product. Lantos Coatings makes no warranty in regards to the performance of the product, once applied by the end user. The purchaser / user assume all risks associated with application of the product. The end user of the product must test the product's suitability its intended application and purpose. If any doubt call Lantos Coating before applying the product to the specific application. Lantos Coatings reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. Users must always refer to the most recent issued MSDS and Product Data Sheet, for the product being used. Copies of all MSDS and Product Data sheet can be found on the Lantos Coatings website. ([www.lantoscoatings.com](http://www.lantoscoatings.com)). The information in this document cannot be reproduced in part or in whole without the express permission of Lanolin Technologies JV with Lantos Coatings Ltd (copyright 2019)